


February 22, 1999
Doc. No. 68589

1. Position the screen with the tabs facing the tailgate of the truck.
2. Place the screen into the hopper with the tabs entering first.

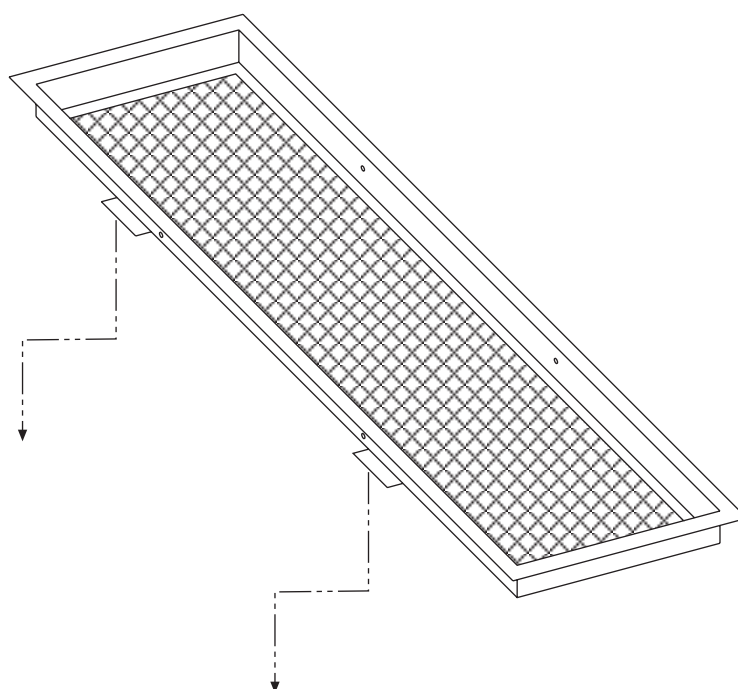

The company reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used herein.